

How to use the single use distal cover


MAJ-2315 for EVIS EXERA III Duodenovideoscope TJF-Q190V




WARNING This quick reference quide is a summary of the steps necessary to properly use your MAJ-2315. Follow the detailed steps instructed in the latest OPERATION/REPROCESSING MANUAL for TJF-Q190V.

CAUTION Do not apply anti-fogging products, olive oil, or products containing petroleum-based substances (e.g., Vaseline®) to the distal cover and the endoscope. These products may cause cracks of the distal cover. If a distal cover with cracks is used, it may cause thermal injury due to electric current leaks when high-frequency cauterization treatment is performed.

Attaching the distal cover

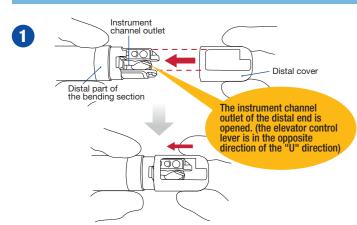


1. Gently hold the distal part of the bending section and the distal cover. Align the opening side of the distal cover with the lens side of the distal end of the endoscope.




2. Put your finger onto the center on the top of the distal cover and push the top of the distal cover straight onto the distal end of the endoscope until the hook of the distal ring is completely visible within the opening of the distal cover.






- 3. Hold the distal part of the bending section. Pull the distal cover gently to confirm that it does not slip and come off.
- 4. Twist the distal cover gently in both directions and confirm that the distal cover on the distal end of the endoscope does not slip and come off.




- **5.** Confirm that the distal cover is free of cracks or deformation.
- **6.** Confirm that there is no adhesion of foreign materials between the distal end of the endoscope and the distal cover.
- 7. Confirm that the single use distal cover is not seen on the endoscopic image.



Detaching the distal cover

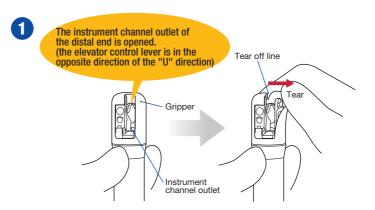


1. Hold the gripper of the distal cover and tear the top of the distal cover along the tear off line.

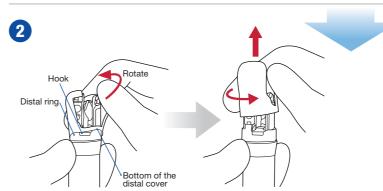


2. Keeping the gripper apart from the distal end, rotate the distal cover in the direction of the arrow as shown above until the bottom of the distal cover is removed from the hook of the distal ring to detach the distal cover.





3. If the distal cover cannot be detached, pull the gripper toward the direction of the arrow as shown above and completely tear the distal cover from the distal end.





4. After using the distal cover, dispose of it in an appropriate manner.

Manufactured by -

OLYMPUS MEDICAL SYSTEMS CORP.

Fax: (042)646-2429 Telephone: (042)642-2111

EC REP OLYMPUS EUROPA SE & CO. KG

(Premises/Goods delivery) Wendenstrasse 14-18, (Letters) Postfach 10 49 08, 20034 Hamburg, Gen Fax: (040)23773-4656 Telephone: (040)23773-0

KEYMED (MEDICAL & INDUSTRIAL EQUIPMENT) LTD.

KeyMed House, Stock Road, Southend-on-Sea, Essex SS2 5QH, Fax: (01702)465677 Telephone: (01702)616333

OLYMPUS MOSCOW LIMITED LIABILITY COMPANY

Elektrozavodskaya str. 27 bld.8, 107023 Moscow, R Fax: (7)495-926-7072 Telephone: (7)495-926-7077

Distributed by

OLYMPUS AMERICA INC.

OLYMPUS LATIN AMERICA. INC.

OLYMPUS (BEIJING) SALES & SERVICE CO., LTD. OLYMPUS KOREA CO., LTD.

OLYMPUS AUSTRALIA PTY LTD

OLYMPUS SINGAPORE PTE LTD

06655, Korea Fax: (02)6255-3210 Telephone: 1544-3202

RC5911 01 N8601193-072018