

ENDOSCOPE POSITION MARKING PROBE

MAJ-1878

Expand your ScopeGuide Capabilities.



ENDOSCOPE POSITION MARKING PROBE

Clear three-dimensional Visualization with all Colonoscopes.

Enhanced Suction Speed

Thanks to a slimmer design, suction is three times faster than the previous model (Position Detecting Probe) when attached to a 3.2 mm channel scope.

PCF and SIF Scope Compatibility



Since this probe can be combined with 2.8 mm or larger instrument channel endoscope, it offers new compatibility with enteroscopes (SIF) while also maintaining compatibility with PCF colonoscopes.

Higher Durability

At least five times greater durability than the previous model (according to internal test results).

Clear three-dimensional Display of the Endoscope Insertion Tube

Insertion of the probe into the instrument channel of the endoscope allows for real-time 3D tracking of the endoscope position using ScopeGuide and can help in the effective management of loops.

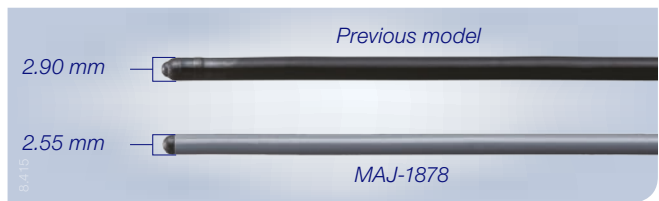

Specifications

Size	
Maximum insertion portion diameter	2.55 mm
Working length	3,500 mm
Detection length	940 mm

Compatible Olympus Endoscopes


(All of these parameters should be met)

Model	CF, PCF, SIF (Except endoscopes with a biopsy elevator or position detecting function)
Channel inner diameter (color code)	2.8 mm or larger 2.8 mm, 3.2 mm (yellow) 3.7 mm, 4.2mm (orange)

Compatible Olympus Endoscope Position Detecting Units

UPD, UPD-3

System Chart

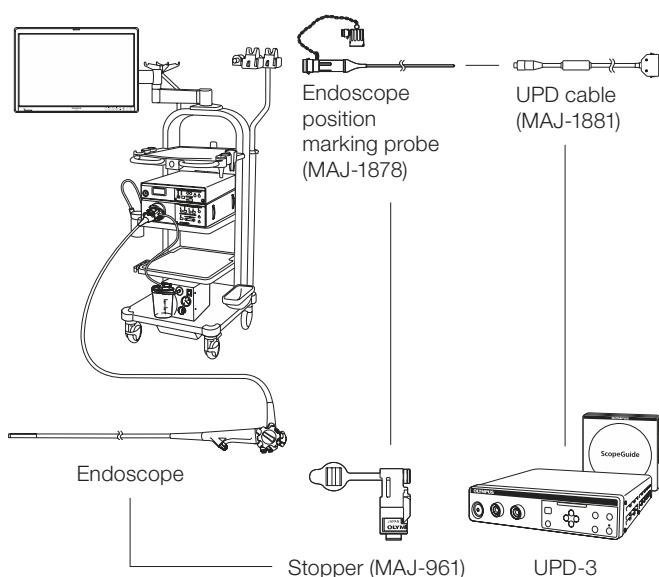

Specifications, design, and accessories are subject to change without any notice or obligation on the part of the manufacturer.

OLYMPUS

OLYMPUS EUROPA SE & CO. KG
Postbox 10 49 08, 20034 Hamburg, Germany
Wendenstrasse 14-18, 20097 Hamburg, Germany
Phone: +49 40 23773-0, Fax: +49 40 237765
www.olympus-europa.com