


## QuickClip Pro

For Effective and Precise Hemostasis

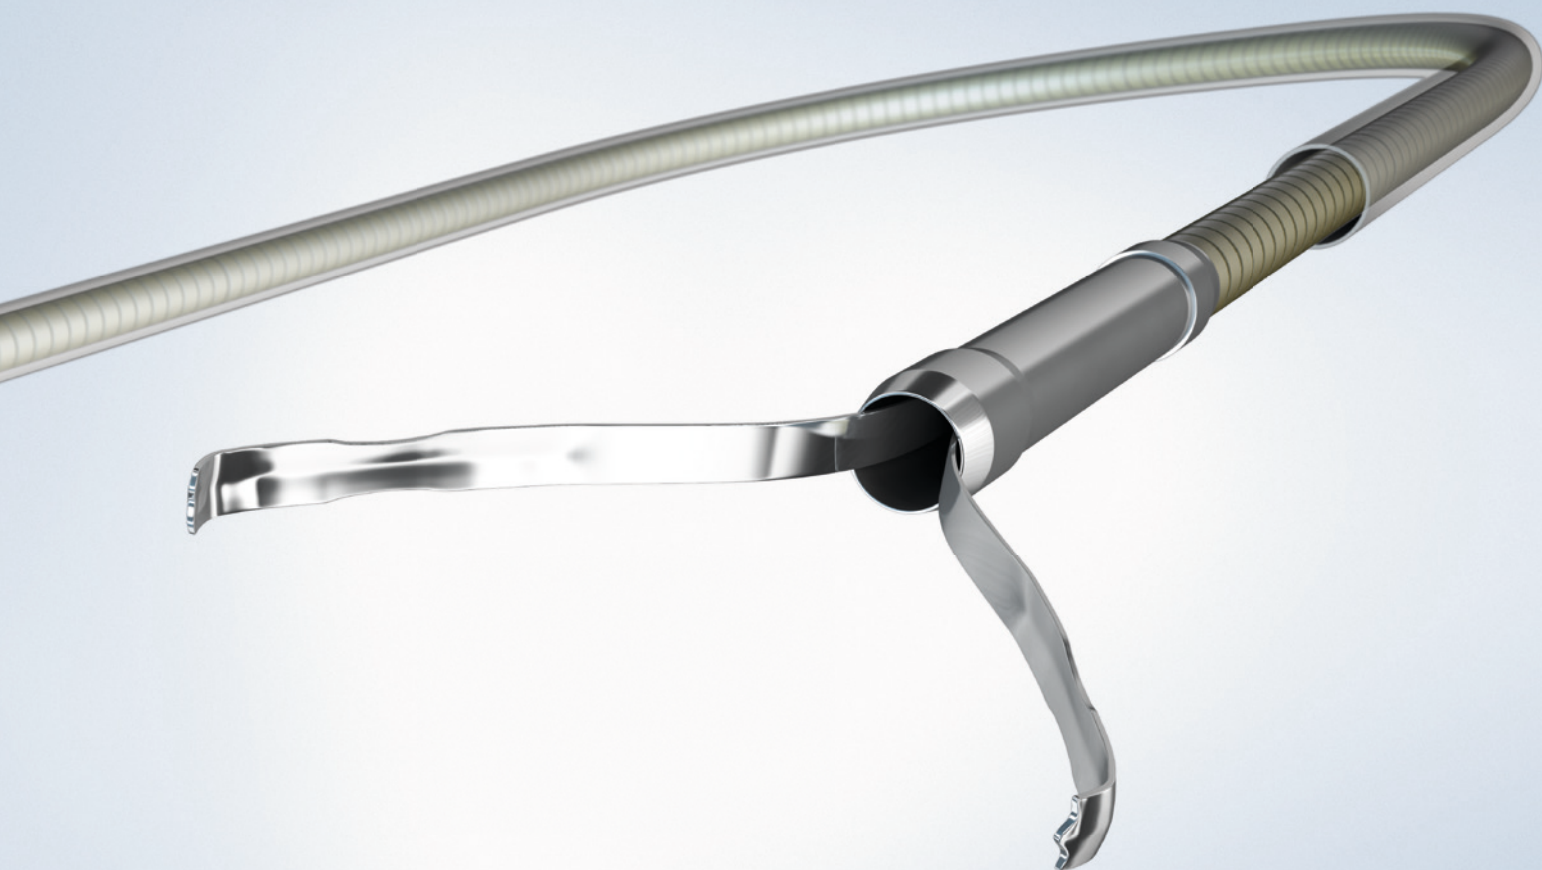

# QuickClip Pro

## For Effective and Precise Hemostasis

The QuickClip Pro helps to maximize the efficacy of the clipping procedure by reducing tissue damage and the risk of rebleeding. Equipped with a unique sheath design for smoother insertion, and highly resilient clip arms to prevent bending, the QuickClip Pro is the clip of choice whenever you want to achieve effective hemostasis.

### Elgiloy

QuickClip Pro is made from Elgiloy, making it unique. It is a high-strength alloy that is stronger yet more flexible than stainless steel. This alloy provides QuickClip Pro with substantial closing strength higher than competitors<sup>1</sup> and at the same time provides high flexibility in placing the clip also for large lesions. Even tangential clipping of laterally positioned target sites is possible.



### Wide, Adjustable Opening

Allows firm grasp on the right amount of tissue required to treat the lesion.

### Resilient Clip Arm and Strong Closure Strength

Elgiloy clip-arm material prevents bending and ensures strong closing force.

### Tangential Clipping


The highly resilient clip arms allow to grasp tissue from different angles and to clip it in lateral positions.

“Mechanically, the clip is very well designed, as it precisely grasps the tissue and continues to hold on tightly to close the tissue, but can be easily released again to correct misplacement.”

Prof. Dr. Hagenmüller, Asklepios Klinik Altona, Hamburg, Germany


### High Flexibility for Wide Effective Clipping Span

Thanks to the Elgiloy material, QuickClip Pro has an effective span width and closing performance of more than 20 mm.<sup>2</sup>

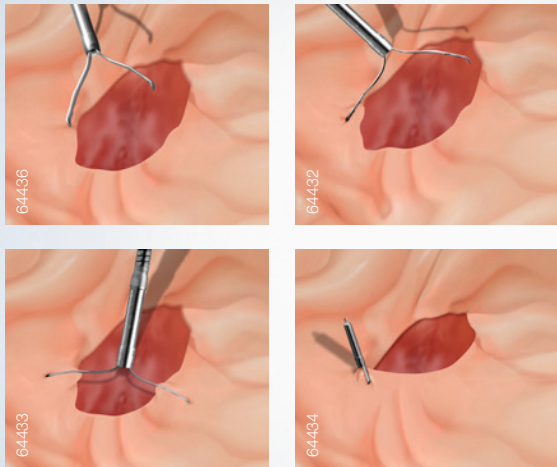

### Tangential Clipping in Lateral Positions

QuickClip Pro can also be used to clip tangentially at a steep angle of 30°.<sup>2</sup>

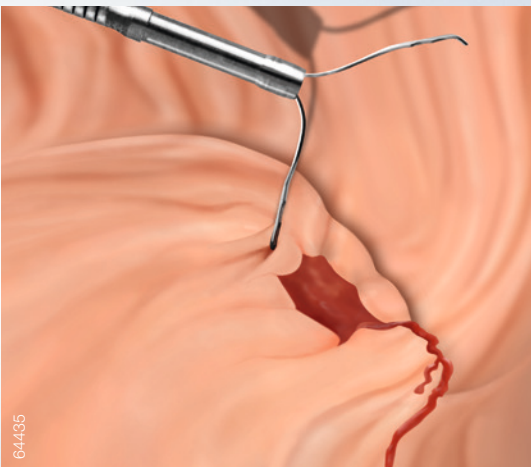

### Unique Sheath Design

Enables smooth insertion and responsive handling, even in complex endoscope angulation. Where others fail, the QuickClip Pro remains functional even in a 180° scope position.<sup>1</sup>



### Scope Protection


The sheath design protects the working channel of the scope without compromising on performance. Potential scope damage from scratching in the endoscope channel may be reduced and avoid costs.



### Sheathless Clip May Harm the Working Channel

#### Competitor A

Tested with PCF-H190L and without sheath as it is most commonly used\*

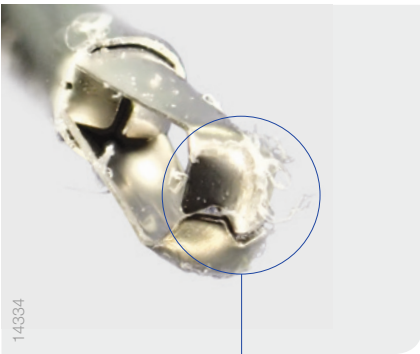


#### Competitor B

Sheathless clip tested with PCF-H190L



#### Competitor C

Sheathless clip tested with both PCF-H190L and GIF-H190\*\*

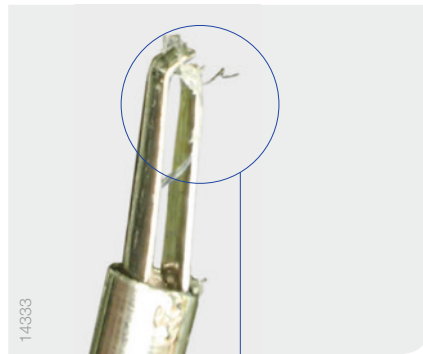

Slivers of the working channel scraped off during clip passage

<sup>1</sup> Technical report — data on file

<sup>2</sup> Benchtop test — data on file


\* Competitor A is designed with a sheath but commonly used without a sheath.

\*\* Picture shows test result after insertion into a GIF-H190.

# QuickClip Pro

## Open-and-Close Function

Facilitates correct positioning and allows for repositioning prior to clip deployment.

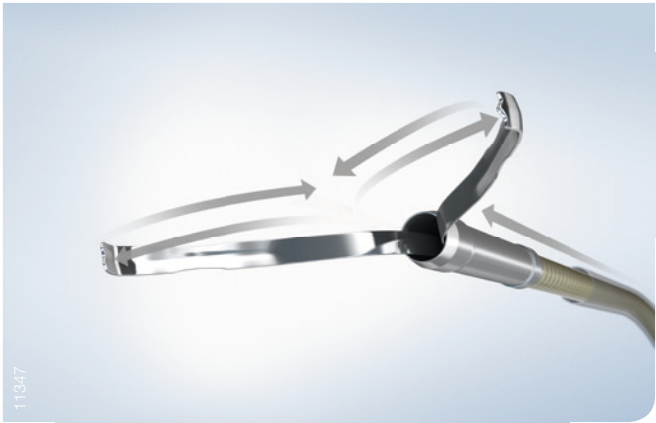

## Full Rotation

360° bidirectional rotation provides accurate control in positioning the clip on the target site.



## Magnetic Resonance (MR) Conditional

The patient can be scanned after the clip is applied. Patient information cards are included in every package of QuickClip Pro.



## Specifications

### QuickClip Pro

Model	Article Number	Working Length	Quantity	Compatible Channel	Maximum Diameter	Opening Width
<b>Upper GI</b>						
<b>HX-202LR A</b>	N4508930	1650 mm	10 pieces	2.8 mm	2.75 mm	11 mm
<b>HX-202LR B</b>	N4509030	1650 mm	5 pieces	2.8 mm	2.75 mm	11 mm
<b>Lower GI</b>						
<b>HX-202UR A</b>	N4509130	2300 mm	10 pieces	2.8 mm	2.75 mm	11 mm
<b>HX-202UR B</b>	N4509230	2300 mm	5 pieces	2.8 mm	2.75 mm	11 mm

Specifications, design and accessories are subject to change without any notice or obligation on the part of the manufacturer.

**OLYMPUS**

**OLYMPUS EUROPA SE & CO. KG**  
Postbox 10 49 08, 20034 Hamburg, Germany  
Wendenstrasse 14-18, 20097 Hamburg, Germany  
Phone: +49 40 23773-0, Fax: +49 40 233765  
[www.olympus-europa.com](http://www.olympus-europa.com)



E0428746 · 05/19 · OEKG